




NINGBO EXCELLENCE COMMUNICATED CONNECTOR CO.,LTD


PLUG:

Drawing						
Mark						
GOLD PLATING	3Mu"	3u"	6u"	15u"	30u"	50u"
Mark						


TYPE	Shielded	Unshielded
Mark		
PC	UL 94-V0	UL 94-V2
Mark		

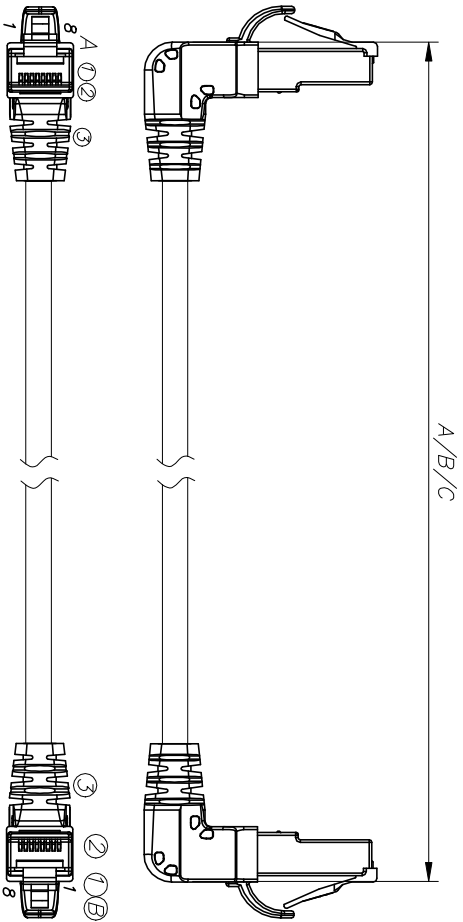

ARRANGE METHOD:



- Remarks:
- I. "A" indicate Length 1~10M 10M not included, tolerance $+_{-80}$
 - II. "B" indicate Length 10~20M(20m included), tolerance $+_{-150}$
 - III. "C" indicate Length above 20M 20m not included, tolerance $+ (C*1\%) / -0$



ITEM	DESCRIPTION	MATERIAL	COLOR	Q'TY	ITEM	DESCRIPTION	MATERIAL	COLOR	Q'TY	DWG NO.
①	PLUG	C6R5Z50V2IL	transparent	2	⑥					P6AUTB139-001
②	Insert	11.06	transparent	2	⑦					
③	PVC	60P		9g	⑧					
④	Cable Tie	"C"MM	white	2	⑨					
⑤					⑩					

MATERIAL		WIRE CONNECTION TABLE							
CAT.6A UTP PATCH CORD 24AWG	PVC	white / orange	orange	white / green	blue	white / blue	green	white / brown	brown
	LSOH	A1	A2	A3	A4	A5	A6	A7	A8
		B1	B2	B3	B4	B5	B6	B7	B8

LENGTH	TOTAL	MOLD NO.	UNIT	SCALE	SHEET
[a/b/c+140]*[19(0)]*[19(0)]		02-139A	mm	1/1	1/1

APPROVAL	CHECKED	DRAWN
		Cathyli