





NINGBO EXCELLENCE COMMUNICATED CONNECTOR CO.,LTD

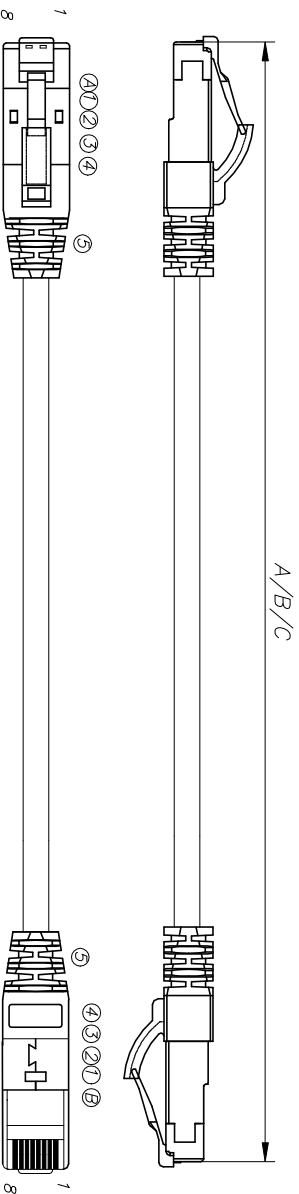

The cable / plug / molding with antibacterial material.
 Antimicrobial activity complies with ISO 22196:2011

ARRANGE METHOD:




- Smoke Density: IEC61034-2
- Halogen Amount: IEC60754-2

Remarks:

- I. "A" indicate the length 1-9M, tolerance ± 0.0
- II. "B" indicate the length 10-20M, tolerance ± 0.150
- III. "C" indicate the length above 20M, tolerance $\pm (C*1\%)/-0$

PLUG:					
Drawing					
Mark					
GOLD PLATING	3Mu"	3u"	6u"	15u"	30u"
Mark					
TYPE	Shielded	Unshielded			
Mark	✓				
Pc	UL 94-V0	UL 94-V2			
Mark		✓			



ITEM	DESCRIPTION	MATERIAL	COLOR	Q'TY	ITEM	DESCRIPTION	MATERIAL	COLOR	Q'TY	DWG NO.					
①	PLUG	66R5Z50V2SL-3D	transparent	2	⑥	Cable Tie	"C"MM	white	2	P6AS/FTB012-091					
②	Insert	3D 11.1 V2	transparent	2	⑦					TITLE					
③	Cross Insert	3E V2(UP) Ø6.0	transparent	2	⑧					Antibacterial Patch Cord-Cat. 6A S/FTP					
④	Cross Insert	3N V2(DOWN) Ø6.0	transparent	2	⑨										
⑤	PVC	60P	—	8g	⑩										
MATERIAL		WIRE CONNECTION		TABLE		LENGTH									
CAT.6A S/FTP PATCH CORD 26AWG		PVC	white / orange	white / green	blue	white / blue	green	white / brown	brown	TOTAL		MOLD NO.	UNIT	SCALE	SHEET
			orange	green	blue	blue	green	brown	brown			02-012	mm	1/1	1/1
			A1	A2	A3	A4	A5	A6	A7			2014/06/03	PROJ.	REV	1
			B1	B2	B3	B4	B5	B6	B7			2014/06/03	APPROVAL	CHECKED	DRAWN
			✓										Carine	Zach	Cathyli
CABLE COLOR		red	orange	yellow	green	blue	purple	gray	white						